



UNILinear Flex

BGC401 400LM 10W 3000K L5 0612 S

UNILinear Flex - 2000 lm - 43 W - 3000 K

UNILinear Flex are extremely waterproof and anti-dust LED strips with professional design to guarantee lighting performance. Thanks to an anti-UV polyurethane filling and processing using irrigation method sealing glue, it not only ensures a high quality of lighting colour consistency but also protects outdoor products against harsh environments. It can be used for decoration lighting and guidance lighting outdoors, the higher CRI (80) delivers good performance of lighting in colour rendering.

Product data

General Information		Controls and Dimming	
Lamp colour code	930 warm white	Dimmable	No
Driver included	No		
Optical cover/lens type	O [Opal]	Mechanical and Housing	
Control interface	-	Housing material	Silicon rubber
Connection	Flying leads/wires	Optical cover/lens material	Silicon rubber
Cable	Cord 0.6 m without plug	Fixation material	Stainless steel
Protection class IEC	Safety class III (III)	Overall length	12 mm
CE mark	CE mark	Overall width	5000 mm
Constant light output	No	Overall height	6 mm
		Colour	White
Operating and Electrical		Approval and Application	
Input Voltage	24 DC V	Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Input frequency	- Hz	Mech. impact protection code	IK04 [0.5 J standard plus]
Power factor (min.)	-		
		Initial Performance (IEC Compliant)	
		Initial luminous flux (system flux)	2000 lm

UNILinear Flex

Luminous flux tolerance	-10%,+15%
Initial LED luminaire efficacy	40 lm/W
Lamp colour temperature	3000 K
Colour Rendering Index	>90
Initial chromaticity	4 SDCM
Initial input power	43 W
Power consumption tolerance	+/-10%

Application Conditions

Ambient temperature range	-40 to +45 °C
---------------------------	---------------


Product Data

Full product code	871016336001000
-------------------	-----------------

Order product name	BGC401 400LM 10W 3000K L5 0612 S
EAN/UPC – product	8710163360010
Order code	911401767922
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	911401767922
SAP net weight (piece)	0.670 kg



Dimensional drawing

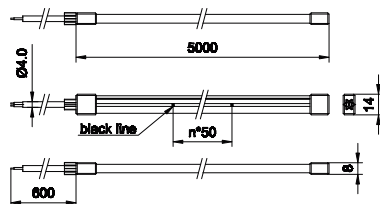

BGC301

