



UV-B Narrowband TL

TL F72T12 100W/01 UV-B

Tubular or compact single-ended low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | |
|---------------------|-----------|
| Cap-Base | RDC [RDC] |

| Light Technical | |
|---------------------------------|----------------|
| Color Code | 01 |
| Color Designation | Ultra Violet B |
| Chromaticity Coordinate X (Nom) | 216 |
| Chromaticity Coordinate Y (Nom) | 208 |

| Operating and Electrical | |
|--------------------------|--------|
| Lamp Current (Nom) | 0.97 A |
| Voltage (Nom) | 126 V |
| Voltage (Nom) | 126 V |


| Mechanical and Housing | |
|------------------------|--------------|
| Bulb Shape | T38 [T 38mm] |

| Approval and Application | |
|----------------------------|---------|
| Mercury (Hg) Content (Nom) | 13.0 mg |

| Product Data | |
|---------------------------------|------------------------|
| Full product code | 871869666235900 |
| Order product name | TL F72T12 100W/01 UV-B |
| Order code | 927978500130 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 25 |
| Material number (12NC) | 927978500130 |
| Full product name | TL F72T12 100W/01 UV-B |
| EAN/UPC - Case | 8718696662366 |


UV-B Narrowband TL

Dimensional drawing

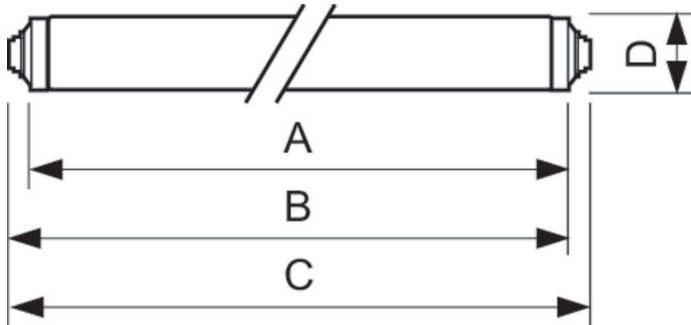

| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|------------------------|---------|------------|------------|------------|------------|
| TL F72T12 100W/01 UV-B | 40.5 mm | 1,755.7 mm | 1,762.8 mm | 1,760.4 mm | 1,775.6 mm |

Photometric data

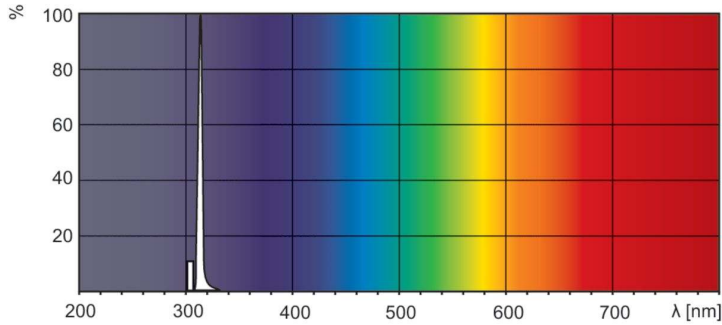

Spectral Power Distribution Colour - TL F72T12 100W/01 UV-B

