



# Flexo Print

## TL 80W/10-R SLV/25

Tubular low-pressure mercury vapour discharge lamps

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]

Light Technical	
Color Code	10-R
Color Designation	Ultra Violet A
Chromaticity Coordinate X (Nom)	222
Chromaticity Coordinate Y (Nom)	210

Operating and Electrical	
Lamp Current (Nom)	0.83 A
Voltage (Nom)	110 V
Voltage (Nom)	110 V

Mechanical and Housing	
Bulb Shape	T38 [T 38mm]

Approval and Application	
Mercury (Hg) Content (Nom)	13.0 mg


  

Product Data	
Full product code	871150061262540
Order product name	TL 80W/10-R SLV/25
Order code	928005901029
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material number (12NC)	928005901029
Full product name	TL 80W/10-R SLV/25
EAN/UPC - Case	8711500612632


# Flexo Print

## Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL 80W/10-R SLV/25	40.5 mm	1,500 mm	1,507.1 mm	1,504.7 mm	1,514.2 mm

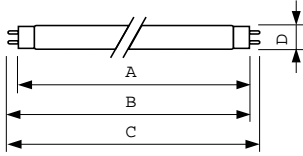

## Photometric data

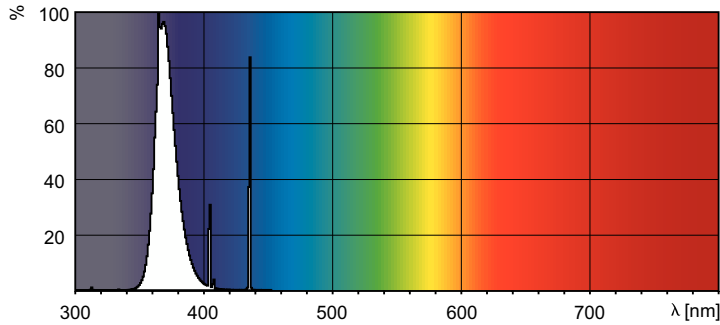

Spectral Power Distribution Colour - TL 80W/10-R SLV/25

