



Architectural MSD

MSD 700.1CT/3

Architectural MSD – single ended night colours The high luminous efficacy and optimal lamp filling of the single ended Architectural MSD lamps create high beam intensity and excellent colour rendering. While the compact arc of the lamp allows efficient beam control and high intensity. Ideal to illuminate architecture of all types at night.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information	
Cap-Base	G22 [G22]
Operating Position	UNIVERSAL [Any or Universal (U)]
Light Technical	
Color Code	- [Not Specified]
Luminous Flux	49,000 lumen
Chromaticity Coordinate X (Nom)	317
Chromaticity Coordinate Y (Nom)	320
Correlated Color Temperature (Nom)	5900 K
Luminous Efficacy (rated) (Nom)	70 lm/W
Color rendering index (CRI)	75
Operating and Electrical	
Lamp Current (Nom)	11 A

Controls and Dimming	
Dimmable	Yes
Product Data	
Full product code	872790091129900
Order product name	MSD 700.1CT/3
Order code	928170405114
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	3
Material number (12NC)	928170405114
Full product name	MSD 700.1CT/3
EAN/UPC - Case	8727900911305


Architectural MSD

Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSD	40 mm	10.0	84 mm	86 mm	85	175 mm	54 mm	53	52 mm
700.1CT/3		mm			mm			mm	

Photometric data

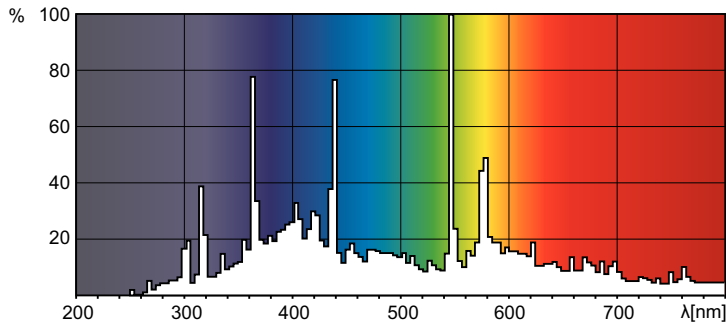

Spectral Power Distribution Colour - MSD 700.1CT/3

