



UV-B Narrowband TL

TL F72T12 100W/01 UV-B

Tubular or compact single-ended low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	RDC [RDC]
Main application	Phototherapy Systems
Life to 50% failures (nom.)	1000 h
Useful life (nom.)	1000 h
Name type	F72T12

Light Technical	
Colour Code	01
Colour Designation	Ultra Violet B
Chromaticity coordinate X (nom.)	216
Chromaticity coordinate Y (nom.)	208
Depreciation at 500 Hours	10 %
UV depreciation at 1,000 h	15 %

Operating and Electrical	
Power (Rated) (Nom)	100 W
Lamp current (nom.)	0.97 A
Voltage (Nom)	126 V

Mechanical and Housing	
Cap-base information	Adaptor


Approval and Application	
Mercury (Hg) content (nom.)	13.0 mg

UV	
UV-B radiation 100 hours (IEC)	15 W

Product Data	
Full product code	871869666235900
Order product name	TL F72T12 100W/01 UV-B
EAN/UPC – product	8718696662359
Order code	927978500130
Numerator – quantity per pack	1
SAP numerator – packs per outer box	25
Material no. (12 NC)	927978500130
Net Weight (Piece)	500.000 g

UV-B Narrowband TL


Dimensional drawing

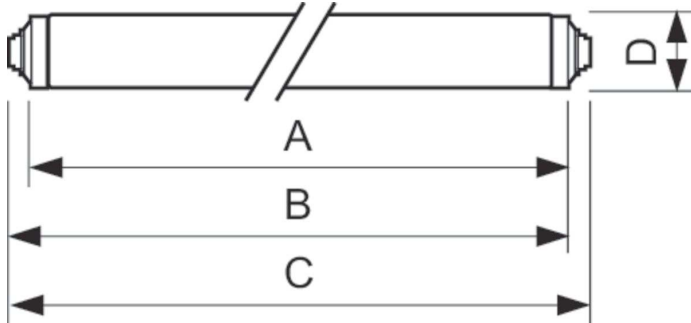


TL F72T12 100W/01 RDC

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL F72T12 100W/01 UV-B	40.5 mm	1755.7 mm	1762.8 mm	1760.4 mm	1775.6 mm

Photometric data

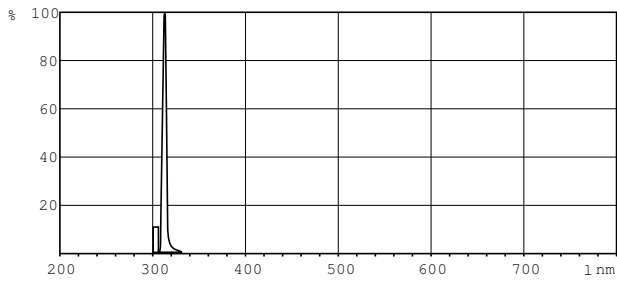

Lightcolour /01

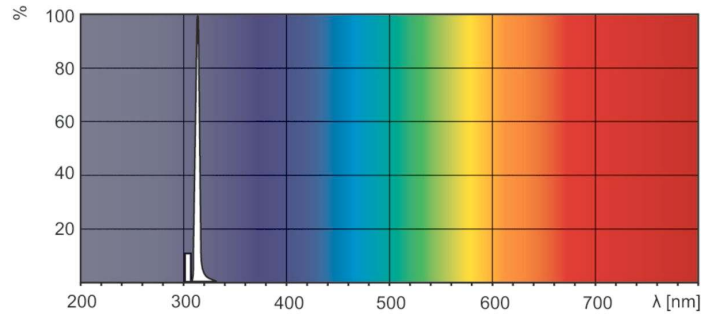

Lightcolour /01

