



# TL-D Standard Colours

## TL-D 36W/33-640 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information		Voltage (Nom)	
Cap base	G13 [ Medium Bi-Pin Fluorescent]	103 V	
Life to 10% failures (nom.)	10000 h	Controls and Dimming	
Life to 50% failures (nom.)	13000 h	Dimmable	Yes
Light Technical		Approval and Application	
Colour Code	33-640	Energy efficiency label (EEL)	B
Lamp Luminous Flux 25°C EL (Nom)	2850 lm	Mercury (Hg) content (nom.)	8.0 mg
Colour Designation	Cool White (CW)	Energy consumption kWh/1,000 hours	43 kWh
Lumen maintenance 10,000 hours (nom.)	75 %	Product Data	
Lumen maintenance 2,000 hours (nom.)	90 %	Full product code	871150070270801
Lumen maintenance 5,000 hours (nom.)	80 %	Order product name	TL-D 36W/33-640 1SL/25
Colour Temperature, horizontal (Nom)	4100 K	EAN/UPC – product	8711500702708
Colour Rendering Index,horiz (Nom)	63	Order code	928048503382
Operating and Electrical		SAP numerator – quantity per pack	1
Power (Rated) (Nom)	36.0 W	Numerator – packs per outer box	25
Lamp current (nom.)	0.440 A	Material no. (12 NC)	928048503382
		SAP net weight (piece)	0.140 kg

# TL-D Standard Colours

ILCOS code

FD-36/41/2B-E-G13


## Dimensional drawing

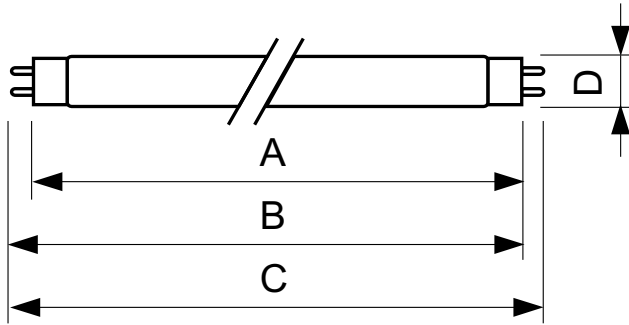

TL-D 36W/33-640

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 36W/33-640	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
1SL/25					


## Photometric data

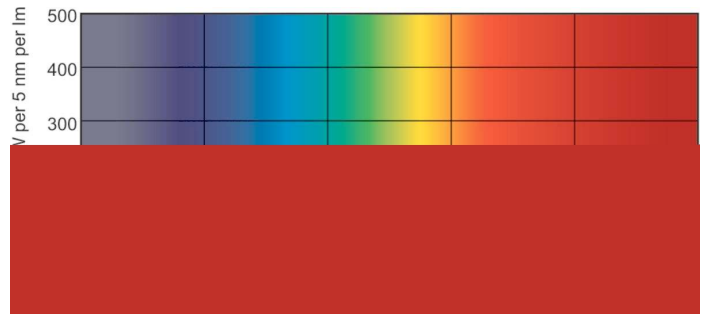


Lightcolour /33-640

Lightcolour /33-640

## Lifetime

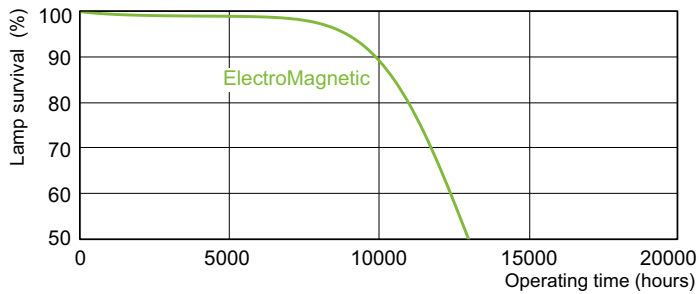

LDLE\_TL-DSTD\_0001-Life expectancy diagram

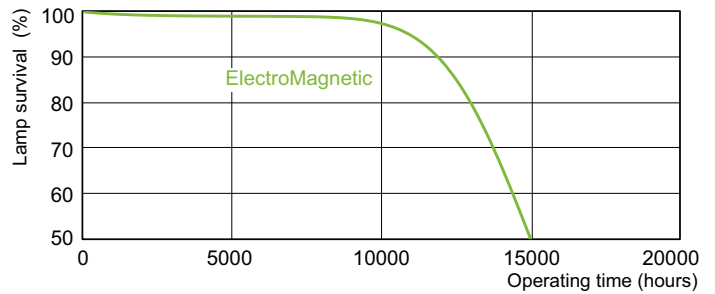

LDLE\_TL-DSTD\_0002-Life expectancy diagram

## TL-D Standard Colours

### Lifetime



LDLM\_TL-DSTD\_0001-Lumen maintenance diagram

