



PowerBalance RC600B

RC600B LED40S/840 PSD W30L120 GM

-- Beam angle 100° - Opal - 120°

When it comes to lighting an office space with LED luminaires, people are willing to invest in sustainability, but only at reasonable cost. At the same time, the system should comply with office lighting norms to ensure a comfortable working environment. PowerBalance is an attractively priced LED luminaire specially developed to meet all office requirements. It consumes significantly less energy while offering longer life of the light source, resulting in lower operational cost compared to traditional luminaires.

Product data

General Information		Flammability mark	
Beam angle of light source	- °	CE mark	NO [-]
Lamp colour code	840 neutral white	ENEC mark	-
Light source replaceable	No	Warranty period	3 years
Number of gear units	1 unit	Constant light output	No
Driver/power unit/transformer	No [-]	Number of products on MCB (16 A type B)	38
Driver included	Yes	EU RoHS compliant	No
Optic type	100 [Beam angle 100°]	LED engine type	LED
Optical cover/lens type	O [Opal]	Operating and Electrical	
Luminaire light beam spread	120°	Input Voltage	220/240 V
Control interface	DALI	Input frequency	50 to 60 Hz
Connection	CI [Internal connector]	Inrush current	14.7 A
Cable	-	Inrush time	250 ms
Protection class IEC	Safety class I (I)		
Glow-wire test	650/30 [Temperature 650 °C, duration 30 s]		

PowerBalance RC600B

Power factor (min.)	0.9
---------------------	-----

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Housing material	Metal
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Optical cover/lens finish	Opal
Overall length	297 mm
Overall width	1197 mm
Overall height	69.7 mm
Colour	White

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK03 [0.3 J]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	4000 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	125 lm/W

Lamp colour temperature	4000 K
Colour Rendering Index	>80
Initial chromaticity	SDCM<4
Initial input power	32 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Median useful life L70B50	50000 h
---------------------------	---------

Application Conditions


Ambient temperature range	-20 to +40 °C
Maximum dimming level	1%
Suitable for random switching	Yes

Product Data


Full product code	911401898299
Order product name	RC600B LED40S/840 PSD W30L120 GM
Order code	911401898299
SAP numerator – quantity per pack	1
SAP numerator – packs per outer box	2
Material no. (12 NC)	911401898299
SAP net weight (piece)	5.299 kg



Dimensional drawing

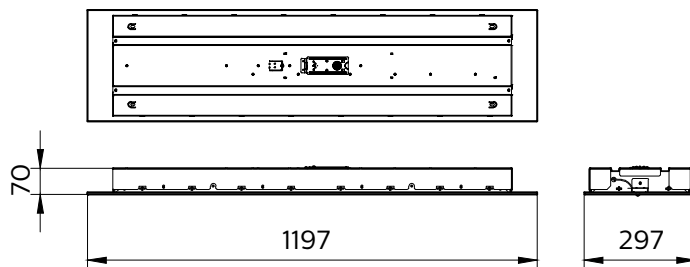

RC600B/RC650B Power Balance G3/G4

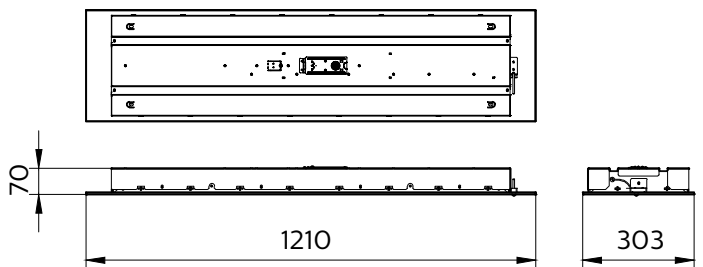

RC600B/RC650B Power Balance G3/G4

PowerBalance RC600B

